


ESD BASIC TROLLEY




AVAILABLE ACCESSORIES

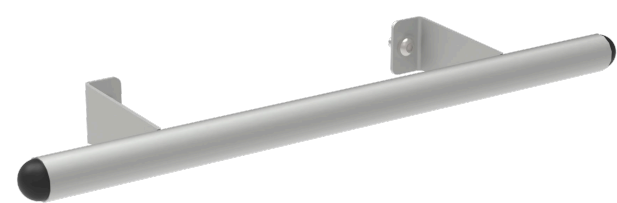

RT-HTB/ESD/45

Handle for trolley

*dedicated for basic trolley 500x700

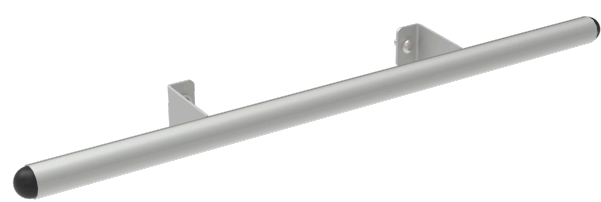

RT-HTB/ESD/60

Handle for trolley

*dedicated for basic trolley 1000x700 and 1500x700



RT-TB/ESD/50/70/W-2

ESD BASIC TROLLEY 500 X 700



RT-TB/ESD/100/70/W-2

ESD BASIC TROLLEY 1000 X 700



RT-TB/ESD/150/70/W-2

ESD BASIC TROLLEY 1500 X 700



+48 52 346 60 92 | +48 503 116 427



export@rtwork.pl | info@robtools.pl



www.rtwork-esd.com



• TECHNICAL SPECIFICATION

ESD BASIC TROLLEY	RT-TB/ESD/50/70/W-2	RT-TB/ESD/100/70/W-2	RT-TB/ESD/150/70/W-2
Width:	500/1000/1500 mm		
Depth:	700 mm		
Weight:	30 kg	40 kg	50 kg
Max load - 1 shelf:	100 kg		
Sheet thickness - shelf:	25 mm		
Type of height adjustment:	MANUAL STEPLESS 1mm		
Height adjustment - one shelf:	610-960		
Number of shelves:	2		
Profil dimension:	30 x 30 x 1,5 mm 35 x 35 x 1,5 mm		
Sheet thickness:	2,5 mm		
Color	RAL 7035 (LIGHT GREY) RAL 9005 (BLACK)		
Material:	CONSTRUCTION STEEL + DOUBLE SIDED ANTISTATIC, DISSIPATIVE, WITH GRAPHITE ADDITIVE, COVERED WITH A MELAMINE LAYER, THICKNESS 25 mm		
Possibility of choosing accessories:	YES		
Type of castors:	ESD ø100mm		
ESD:	YES		
Resistance grounding:	10^4 - 10^8		
Compliance with standards:	ANSI/ESD S.20.20.2014, PN-EN 61340-5-1:2024, PN-EN ISO 9001:2015, PN-EN ISO 3834-2:2021, PN-EN 1090-1:2009+A1:2011		

