


ELECTRIC WORKSTATIONS L-TYPE - 2000 LIGHT DUTY




MAX LOAD
150kg

AVAILABLE MODELS (by type of tabletop)

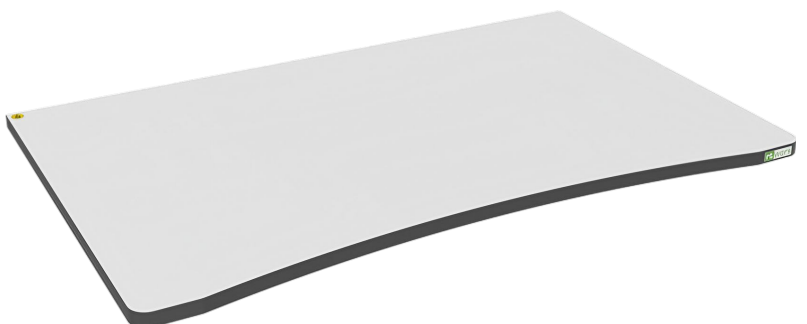


ergonomic

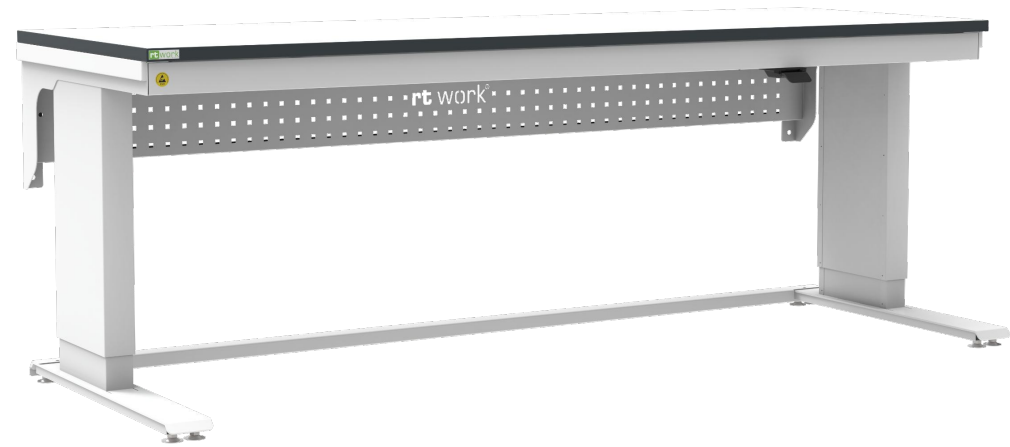


RT-L/E/ESD/200/70/LD

MANUAL WORKSTATION 2000 X 700

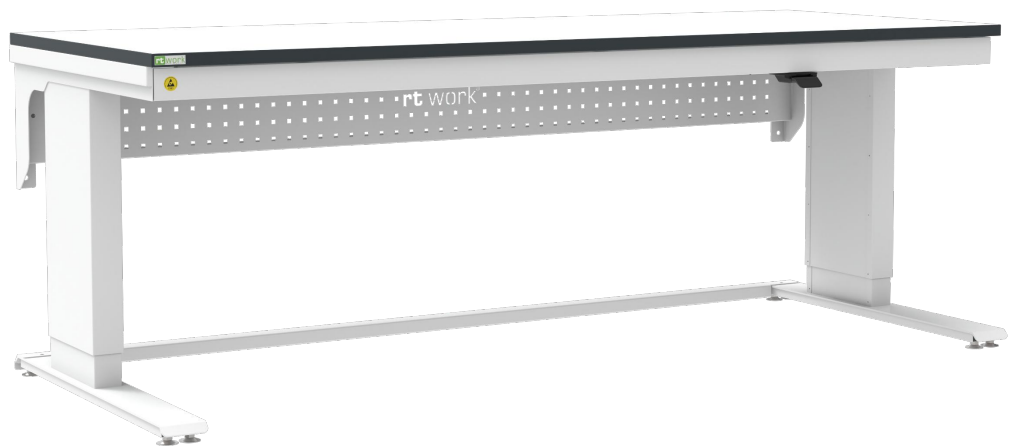

RT-L/E/ESD/200/80/LD

MANUAL WORKSTATION 2000 X 800

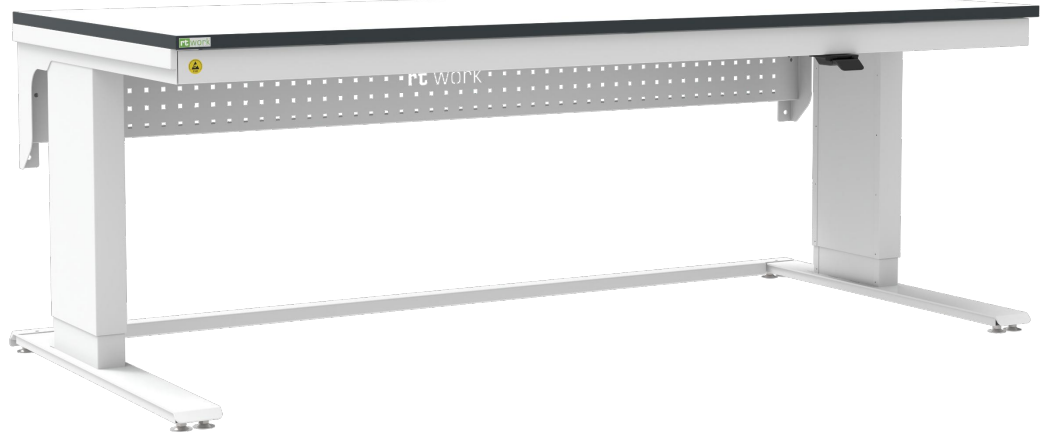

RT-L/E/ESD/200/90/LD

MANUAL WORKSTATION 2000 X 900

MANUAL WORKSTATIONS H-TYPE - 2000 LIGHT DUTY



• TECHNICAL SPECIFICATION

Rectangular tabletop	RT-L/E/ESD/200/70/LD	RT-L/E/ESD/200/80/LD	RT-L/E/ESD/200/90/LD
Ergonomic tabletop	RT-L/E/ESD/200/70/E/LD	RT-L/E/ESD/200/80/E/LD	RT-L/E/ESD/200/90/E/LD
Type of height adjustment:	ELECTRIC		
Height adjustment range:	700 - 1150 mm		
Width:	2000 mm		
Depth:	700 mm	800 mm	900 mm
Weight:	84 kg	87 kg	90 kg
Max load:	150 kg		
Profil dimension:	40 x 40 x 1,5 mm 60 x 40 x 1,5 mm		
Sheet thickness – actuator housings:	1,50 mm		
Sheet thickness – transverse bottom joint:	1,50 mm		
Sheet thickness – lower bar:	2 mm		
Color:	RAL 7035 (LIGHT GREY) RAL 9005 (BLACK)		
Material of table frame:	Construction steel		
Tabletop:	DOUBLE SIDED ANTISTATIC, DISSIPATIVE, WITH GRAPHITE ADDITIVE, COVERED WITH A MELAMINE LAYER, THICKNESS 25 mm		
Possibility of choosing accessories:	YES		
Type of glides:	SELF-LEVELLING		
Resistance tabletop – grounding:	10 ⁴ – 10 ⁸ Ohm		
Resistance table frame:	10 ⁴ – 10 ⁸ Ohm		
ESD:	TAK		
Compliance with standards:	ANSI/ESD S.20.20.2014, PN-EN 61340-5-1:2024, PN-EN ISO 9001:2015, PN-EN ISO 3834-2:2021, PN-EN 1090-1:2009+A1:2011		
Power supply:	230V AC → 24V DC		
Max speed:	38 (mm/s)		
Max force:	1500 (N)		