


ESD POLYURETHANE COMFORT CHAIR

Catalog number: RS-K9ESD-C



AVAILABLE MODELS (by seat height range)

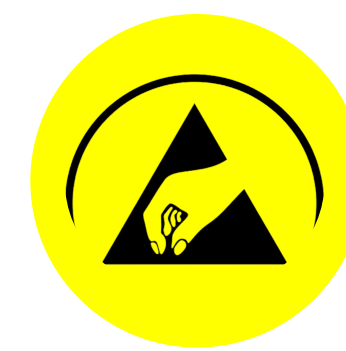

RS-K9ESD-A

Seat adjustment range:
430-560 mm



RS-K9ESD-B

Seat adjustment range:
510-700 mm



RS-K9ESD-C

Seat adjustment range:
550-800 mm


ESD POLYURETHANE COMFORT CHAIR



Catalog number: RS-K9ESD-C



FUNCTIONS OF ADJUSTMENT

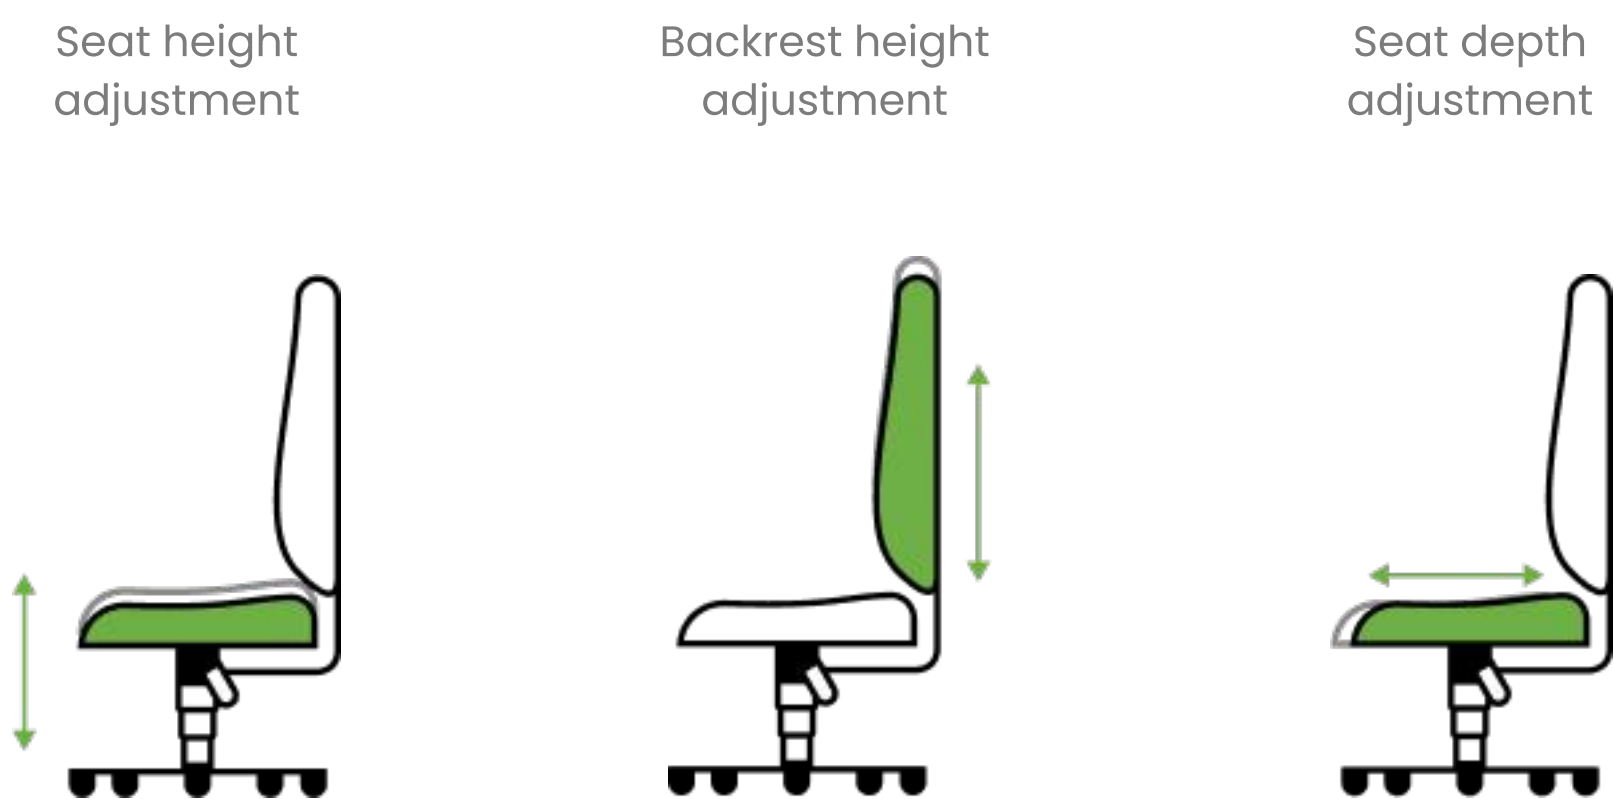

*dimensions shown in mm

Model	Height adjustment range [mm]	Total height [mm]	Total width [mm]	Seat dimensions [mm]	Backrest dimensions [mm]	Load capacity [kg]	Weight [kg]
RS-K9ESD-C	550 - 800	840 - 1170	660	450 - 440	310 - 400	120	11,8

MATERIALS

Material shade in reality may slightly differ from that presented in the catalog.

- Comfort of use:** Soft polyurethane seat and backrest with height adjustment ensures ergonomic comfort during work.
- Safety:** Antistatic properties compliant with ESD standards effectively protect against electrostatic discharge.
- Durability:** Sturdy aluminum base and dirt-resistant polyurethane ensure long-term use in demanding environments.
- Application:** The Antistatic Polyurethane Comfort Chair is an ideal choice for laboratories, service centers, and production environments requiring strict electrostatic control.



Chair compliant with standards:
ANSI/ESD S.20.20.2014, PN-EN 1335-1:2004, PN-EN 1335-2:2009, PN-EN 1335-3:2009, PN-EN 1022:2007, PN-EN 61340-5-1:2024

ACCESSORIES:

